


## Refrigeration Pressure gauge

### Type A10 - Front Line

Date: September 2002

Sheet No.:1-40gb

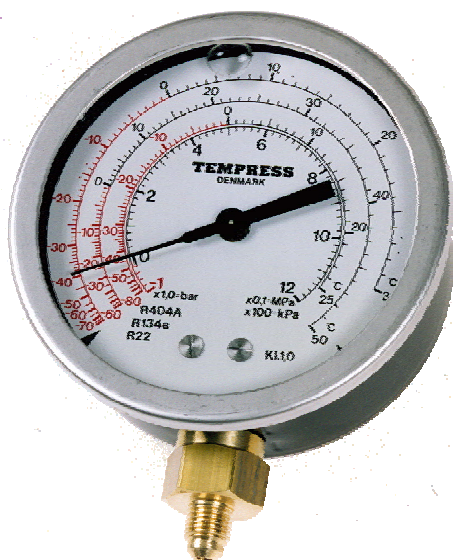

### Refrigeration pressure gauge

- Liquid filled
- Connection: bottom or rear
- Direct, wall or panel mounting
- More than 40 different connecting threads
- Long-term stable
- Vibration protected
- Many types of refrigeration scales, graded in pressure and temperature

### Application

This series of pressure gauges is well suited for application in the refrigeration industry.

### Module System

The TEMPRESS program of connecting nipples and mounting auxiliaries makes it possible to deliver thread type and mounting form as required.

The program of refrigeration scales cover most refrigeration media available on the market. The scale can be delivered with 1, 2 or 3 refrigeration media.

### Temperature Compensation

The unique system for temperature compensation ensures a correct reading even under heavily fluctuating ambient temperatures (0-60°C)

### Safety

The temperature compensation system simultaneously works as blasting protection, i.e. if the measuring system blasts due to overpressure, the temperature compensation is blown out from the back of the instrument.

Approved by DNV (Det Norske Veritas).

### Specifications

Pressure Gauges:	DN 63 type A1001 DN 80 type A1002 DN 100 type A1003 DN 160 type A1004
Case material:	Steel, black enamelled
Option:	AISI 316
Glass face:	Acrylic
Bezel:	AISI 316
Liquid filling	Glycerine
Connection:	Brass, steel or AISI 316
Measuring system:	Brass/bronze, steel or AISI 316
Range:	-1-0+12 bar -1-0+25 bar Other ranges on request
Accuracy:	Cl. 1.0 ( $\pm 1\%$ FS)
Refrigeration media:	R22, R134a, R404, R507, Ammonia (R717) Other media on request

TEMPRESS reserves the right to changes without notice

Agent/Dealer:



001

### TEMPRESS A/S

Nordlandsvej 64-66  
DK-8240 Risskov, Denmark  
Tel.: +45 8932 5210  
Fax.: +45 8932 5213  
sales@tempress.dk  
www.tempress.dk